


Ordering MicroStar™ LED Light Bars

For your NOVA II Rail System


68" - 72"

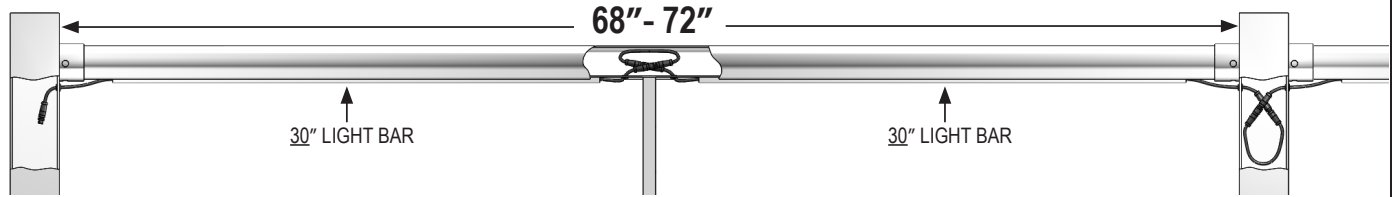

STANDARD - (2) S0825-0030-XX (30" MicroStar™ Light Bar)
 (1) S0825-JMPR-SC (12" MicroStar™ Jumper)
 (4) S0825-GR1203 (Wiring Grommet - 1/8")

OPTIONAL - (1) S0825-JMPR-SC (12" MicroStar™ Jumper)
For connecting to lighting installed on the next rail section

48" - 68"

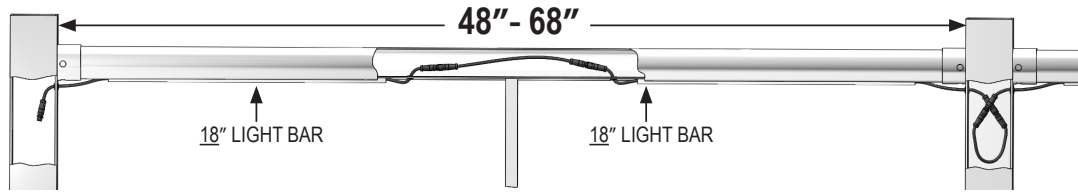


STANDARD - (2) S0825-0018-XX (18" MicroStar™ Light Bar)
 (4) S0825-GR1203 (Wiring Grommet - 1/8")
For 48"-60" Sections
 (1) S0825-JMPR-SC (12" MicroStar™ Jumper)
For 60"-68" Sections
 (2) S0825-JMPR-SC (12" MicroStar™ Jumper)

OPTIONAL - (1) S0825-JMPR-SC (12" MicroStar™ Jumper)
For connecting to lighting installed on the next rail section

48" or LESS SECTION LENGTHS = NO STABILIZER


46" - 48"

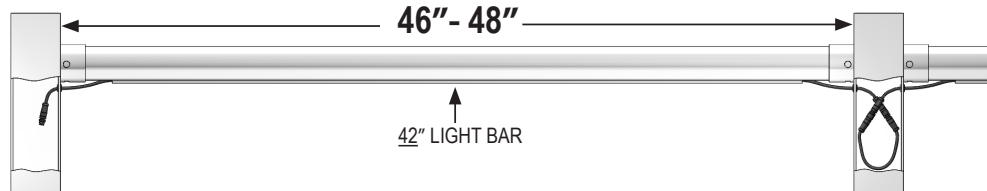

STANDARD - (1) S0825-0042-XX (42" MicroStar™ Light Bar)
 (2) S0825-GR1203 (Wiring Grommet - 1/8")

OPTIONAL - (1) S0825-JMPR-SC (12" MicroStar™ Jumper)
For connecting to lighting installed on the next rail section


34" - 46"

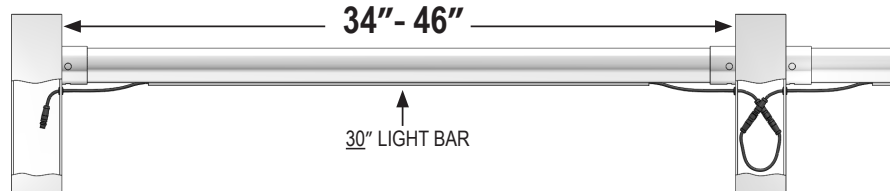

STANDARD - (1) S0825-0030-XX (30" MicroStar™ Light Bar)
 (2) S0825-GR1203 (Wiring Grommet - 1/8")

OPTIONAL - (1) S0825-JMPR-SC (12" MicroStar™ Jumper)
For connecting to lighting installed on the next rail section

22" - 34"

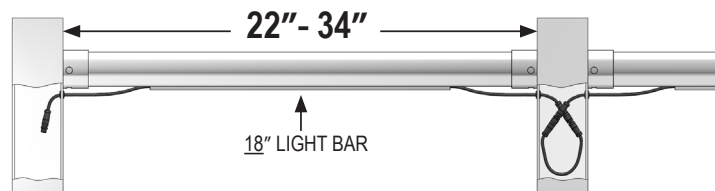

STANDARD - (1) S0825-0018-XX (18" MicroStar™ Light Bar)
 (2) S0825-GR1203 (Wiring Grommet - 1/8")

OPTIONAL - (1) S0825-JMPR-SC (12" MicroStar™ Jumper)
For connecting to lighting installed on the next rail section